

No-passing single-yellow centerline section

When a rumble strip is to be installed at a no-passing single-yellow centerline, the following dimensions shall be the standard. It is desirable that these dimensions be applied to sections transitioning from a no-passing double-yellow centerline section to a single-yellow centerline section.

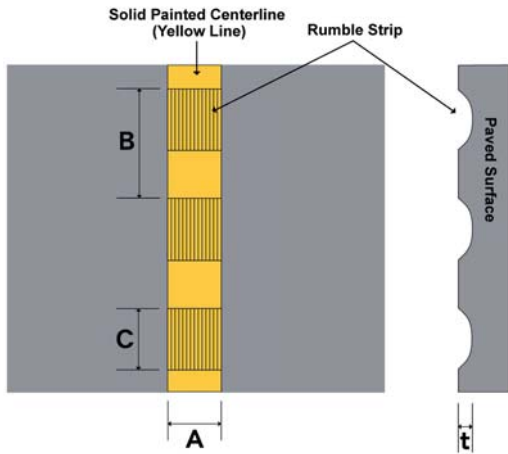


Figure 2-3: Rumble strip at a no-passing single-yellow centerline (specification)

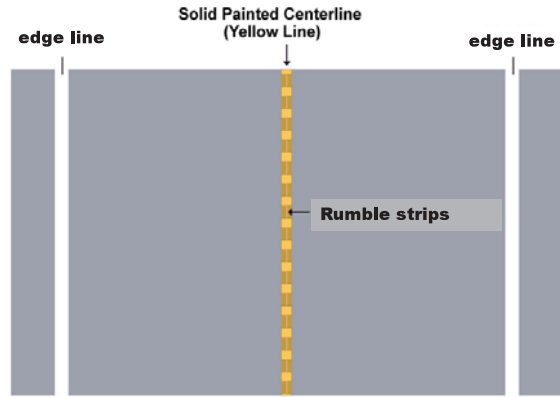


Figure 2-4: Rumble strip at a no-passing single-yellow centerline (installation location)

Table 2-2: Rumble Strip Dimensions

Parameter		Specification (mm)
Transverse width	A	150
Milling pitch	B	300
Longitudinal width	C	170
Depth	t	15



Photo 2-7: Rumble strip at a no-passing single-yellow centerline section



Photo 2-8: Rumble strip at a no-passing single-yellow centerline section (close-up)